

STRATUS ENQUIRY FORM v4

Email all enquiries to: **consquotations@synseal.com**
 Tel: 01623 443200
 Fax back to: 01623 443305
www.synseal.com



Required delivery date: / /
 Order reference:
 Signature:


Company:
 Account No.
 Address:
 Postcode:
 Tel:
 Fax:
 Mobile:
 Contact Name:

Quote: Order: Page: of

Important! Please note dimension for the Stratus lantern roof are taken to the outside of the timber support frame.

STYLE OPTIONS


Width W: mm
 Length L: mm
 Width (W) & Length (L) dimension
to outside of timber support frame

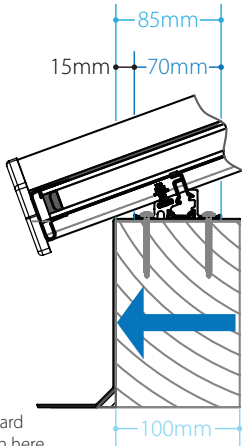

Standard shown here

SKETCH OF DESIGN (EXTERNAL VIEW)

Use the template to draw the desired rafter layout of your roof design giving your dimensions in **millimetres**

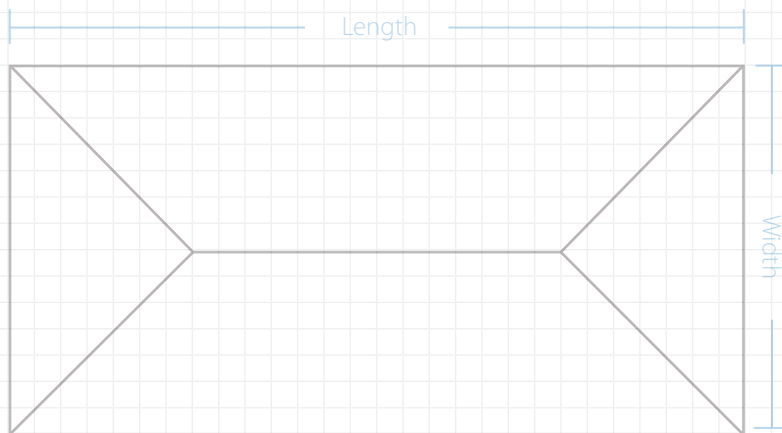

ROOF COLOUR

EXTERNAL	INTERNAL
White (RAL 9016) <input type="checkbox"/>	White <input type="checkbox"/>
Grey (RAL 7016) <input type="checkbox"/>	Grey (RAL 7016) <input type="checkbox"/>

ROOF GLAZING

- Unglazed for 24mm Units
- Clear
- Low 'E'
- Low 'E' Bronze
- Low Maintenance Aqua Tint
- Low Maintenance Blue Tint
- Celsius One Blue Tint
- Celsius Elite Blue Tint
- Celsius Clear Neutral Tint
- Bio Clean Blue

We will use 0.6kn/m² to calculate the snow loading on this roof, if you need this changed please let us know.

GENERAL INFORMATION

- Roof Pitch Fixed 20°
 - 24mm Glazing in all Lantern Roofs
 - All Lantern Roofs are supplied with Aluminium External Glazing Bar Cappings and Castings
 - All Lantern Roofs are supplied with PVC-U Internal Glazing Bar Cappings
 - The Lantern Roof is supplied without any Finial or Decorative Crestings
 - Lead time for orders: 5 Days
 - Maximum Size for Contemporary Roof: Length L=3000mm / Width W=1500mm**
 - Maximum Size for 2-Way Lantern Roof: Length L=6000mm / Width W=1500mm**
 - Maximum Size for 3-Way Lantern Roof: Length L=6000mm / Width W=3000mm**
 - Suggested timber support to be 100mm wide by 150mm high (Not supplied with Lantern Roof)
 - For optimum aesthetic appeal use Width W x 1.5/2/2.5 etc to obtain Length L.
(e.g 1400mm W x 1.5 = L 2100mm)
- **Maximum Sizes Shown refer to External Face of Timber Support

Other notes:

Date: / / Signed:
 Print:

Our conditions of sale shall apply to the sale of the goods to the exclusion of all other terms, unless agreed in writing by Synseal Extrusions Ltd.

The Stratus Lantern roof has been specifically designed to be fastened down to a structurally supportive upstand in a flat roof situation. It is the sole responsibility of the installing company to make sure the supporting superstructure is designed to resist the lateral loads imposed by the Stratus Lantern.
 We reserve the right to alter specifications and descriptions without prior notice as part of our policy of continuous development. E&OE. Version 2.



Phone: 01623 443200
Fax: 01623 443305
Email: consquotations@synseal.com